

1242742

UNITED STATES PATENT AND TRADEMARK OFFICE
U.S. DEPARTMENT OF COMMERCE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

October 27, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE.

APPLICATION NUMBER: 60/510,253
FILING DATE: *October 10, 2003*
RELATED PCT APPLICATION NUMBER: PCT/US04/33173

Certified by

Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office



PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

U.S. PTO
60/510253

101003


Docket Number	1700.191USP		Type a plus sign (+) inside this box ->	+ 0746 60/510253
INVENTOR(s)/APPLICANT(s)				
LAST NAME	FIRST NAME	MIDDLE NAME/INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)	
Abbott	Douglas	A.	435 Apple Blossom Road, Easton, Pennsylvania 18040	
TITLE OF INVENTION (280 characters max)				
CHILD-RESISTANT PACKAGE				
CORRESPONDENCE ADDRESS (including country if not United States)				
<p>Greeley, Paul D. Ohlandt, Greeley, Ruggiero & Perle, L.L.P. One Landmark Square, 10th Floor Stamford, Connecticut 06901-2682</p>				
ENCLOSED APPLICATION PARTS (check all that apply)				
<input checked="" type="checkbox"/> Specification Number of Pages [19] [] Small Entity <input checked="" type="checkbox"/> Drawing(s) Number of Sheets [10] [] Other (specify) []				
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)				
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees. <input type="checkbox"/> The Commissioner is hereby authorized to charge the filing fees and credit Deposit Account Number: []			FILING FEE AMOUNT (\$160/\$80)	\$160.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

No.

Yes, the name of the U.S. Government agency and the Government contract number are:

Respectfully submitted,

SIGNATURE 

Date [10 / 10 / 03]

CUSTOMER NO.: 27623

TYPED or PRINTED NAME Paul D. Greeley REGISTRATION NO. [31,019]
(if appropriate)

Additional inventors are being named on separately numbered sheets attached hereto.

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

Burden Hour Statement: This form is estimated to take .2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s): Douglas A. Abbott
Serial No.: Not Yet Assigned
Filed: Herewith
For: CHILD-RESISTANT PACKAGE
Customer No.: 27623
Attorney Docket No.: 1700.191USP

PROVISIONAL PATENT APPLICATION TRANSMITTAL

MAIL STOP PROVISIONAL PATENT APPLICATION
COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, VA 22313-1450

We enclose for filing under 37 C.F.R. §1.53(c);

XXX Provisional Application Cover Sheet;

XXX 19 sheets of Specification (12 pages of Description; 6 pages of Claims; 1 page Abstract);

XXX 10 sheets of drawings; and

 An assignment of the invention to: _____, including the \$40.00 recordation fee and Assignment Recordation Form Cover Sheet;

The Filing Fee is calculated below.

CLAIMS AS FILED				
(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee \$160.00
TOTAL FILING FEE			\$160.00	
1/2 FILING FEE FOR SMALL ENTITY			\$	

 The undersigned attorney has verified that the applicant is entitled to a Small Entity Status.

XXX A firm check in the amount of \$ 160.00 to cover the filing fee is enclosed.

XXX The Commissioner is hereby authorized to charge any additional fees under 37 C.F.R. §§1.16 and 1.17 which may be required with this communication or during the entire pendency of the application, or credit any overpayment, to **Deposit Account No. 01-0467**. A duplicate copy of this Form is enclosed.

Address all future communications to: **Paul D. Greeley, Esq.
Ohlandt, Greeley, Ruggiero & Perle, L.L.P.
One Landmark Square, 10th Floor
Stamford, Connecticut 06901-2682
U.S.A.**

October 10, 2003
Date of Signature



**Paul D. Greeley, Esq.
Attorney for Applicant
Ohlandt, Greeley, Ruggiero & Perle, L.L.P.
Registration No. 31,019
Telephone: (203) 327-4500
Telefax: (203) 327-6401**

CERTIFICATE OF EXPRESS MAIL

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail, Post Office to Addressee, Certificate No. EV 357653144 US in an envelope addressed to Mail Stop Provisional Patent Application, Mail Stop Provisional Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on October 10, 2003.

Mary R. Charles
Name



Signature

CHILD-RESISTANT PACKAGE

BACKGROUND OF THE INVENTION

5

1. Field of the invention

The invention relates to a package for dispensing and delivering product. The invention further relates to a child-resistant package. The 10 invention still further relates to a closure for a child-resistant package. The invention still yet further relates to a container for a child-resistant package.

2. Description of the Prior Art

15 Child-resistant packages have been developed for use in dispensing products deemed potentially harmful to children if imbibed or otherwise exposed. Such packages typically comprise a container and a closure. The closure typically requires mechanical manipulation to unscrew or decouple from the container. Some common types include push-and-turn and 20 squeeze-and-turn. Such packages have commonly been employed with tubular plastic dispensing containers.

Some squeeze-and-turn tubular plastic dispensing containers have employed locking lugs on the base or shoulder of a container to engage 25 portions of a closure. Examples of such packages are shown in Great Britain Patent Application 2,030,970 A1 and U.S. Patent Nos. 4,335,823; 4,413,743; 5,145,080; 5,988,412; 5,915,576; 6,112,921 and 6,357,615 B1.

Squeeze-and-turn tubular plastic dispensing containers have 30 heretofore been unavailable in small diameter sizes, i.e., 0.50 to 0.75 inch in base or shoulder diameter. Containers of small diameter are difficult to design because of the relatively small circumference available to achieve mating between lugs and the closure.

It would be desirable to have a child-resistant package of small diameter size. It would further be desirable to have a child-resistant package of the squeeze-and-turn type. It would further be desirable to have a child-resistant package employing locking lugs.

5

SUMMARY OF THE INVENTION

According to the present invention, there is a dispensing tube package. The package has a dispensing container and a closure

10 engageable and lockable with the dispensing container. The container has a body wall and a head. The head has a neck and a shoulder. The body wall defines a chamber therein. The neck communicates with the body wall via the shoulder. The neck has an orifice therein and a passageway therethrough extending from the orifice to the chamber. One or more lugs

15 extend from the shoulder adjacent the periphery of the shoulder. The neck has a first thread extending therefrom. The first thread has a pitch of about 0.08 to about 0.16 inch and an initial full thread generally in alignment with the lug directional with the longitudinal extension of the neck. The closure has a top end having a generally circumferential outer skirt extending

20 therefrom and a generally circumferential inner skirt extending therefrom. The inner skirt is situated inside the outer skirt. The inner skirt has a second thread extending therefrom at an inner surface. The second thread is rotatably engageable with the first thread of the neck. The outer skirt terminates at a first edge opposite the top end. The inner skirt terminates

25 at a second edge opposite the top end. The outer skirt has a slot therein extending inward from the edge. The slot therein is adapted to receive a portion of the lug therein when the closure is in locking position with the head.

30 Further according to the present invention, there is a dispensing container. The dispensing container has a body wall and a head. The head has a neck and a shoulder. The body wall defines a chamber therein. The neck communicates with the body wall via the shoulder. The neck has an orifice therein and a passageway there through extending from the

orifice to the chamber. One or more lugs extend from the shoulder adjacent the periphery of the shoulder. The neck has a first thread extending therefrom. The first thread has a pitch of about 0.08 to about 0.16 inch and an initial full thread generally in alignment with the lug
5 directional with the longitudinal extension of the neck.

Further according to the present invention, there is a closure. The closure has a top end having a generally circumferential outer skirt extending therefrom and a generally circumferential inner skirt extending
10 therefrom. The inner skirt is situated inside the outer skirt. The inner skirt has a second thread extending therefrom at an inner surface. The second thread is rotatably engageable with the first thread of the neck. The outer skirt terminates at a first edge opposite the top end. The inner skirt terminates at a second edge opposite the top end. The outer skirt has a
15 slot therein extending inward from the edge. The slot defines a flat surface adjacent thereto. The flat surface is generally directional with the longitudinal extension of the outer skirt. The slot extends angularly from the edge therein to the flat surface.

20

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of an embodiment of a dispensing package according to the present invention.

25

Figure 2 is a perspective view of an embodiment of a closure according to the present invention.

30

Figure 3 is a cross-sectional view of the closure of Figure 2 along

the line 3-3.

Figure 4 is a side view of the closure of Figure 2.

Figure 5 is a perspective partial view of an embodiment of a dispensing container according to the present invention.

Figure 6 is a top view of the dispensing container of Figure 5.

5

Figure 7 is a side view of the dispensing container of Figure 5.

Figure 8 is a cross-section view of the package of Figure 1 along line 8-8.

10

Figure 9 is a closeup view of the threads of the closure of Figure 3.

Figure 10 is a perspective view of another embodiment of a closure of the present invention.

15

Figure 11 is a cross-sectional view of the closure of Figure 10 along the line 11-11.

Figure 12 is a perspective view of still another embodiment of a dispensing container according to the present invention.

20

Figure 13 is a partial side view of the dispensing container of Figure

12.

25

Figure 14 is another partial side view of the dispensing container of Figure 12.

Figure 15 is a top view of the dispensing container of Figure 12.

30

Figure 16 is a cross-sectional view of a package formed when the closure of Figure 2 is engaged with the dispensing container of Figure 12 in the same manner as in Figure 1. The cross-section is viewed from the same reference as line 8-8 in Figure 1.

Figure 17 is a perspective view of yet another embodiment of a dispensing container according to the present invention.

Figure 18 is a partial side view of the dispensing container of Figure
5 17.

Figure 19 is a partial side view of the dispensing container of Figure
17.

10 Figure 20 is top view of the dispensing container of Figure 17.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

15 The following are preferred aspects and features of the present
invention.

20 A preferred slot in the closure can be substantially the same shape
as the portion of the lug to be received therein. The slot defines a vertical
edge adjacent thereto, and the vertical edge is generally directional with
respect to the longitudinal extension of the outer skirt. The slot extends
angularly from the edge of the outer skirt therein to the vertical edge.

25 A preferred lug defines a flat surface generally directional with the
longitudinal extension of the neck. The flat surface is engaged with the
vertical edge when the closure is in locking position with the head. In one
embodiment, the lug extends from the neck radially outward. The lug is
substantially free of contact with the neck. In another embodiment, the lug
has a notch therein at an outer portion thereof with the notch bearing a flat
30 surface. In a preferred embodiment, there are two lugs extending from the
shoulder with the two lugs being positioned oppositely about the neck.
Preferably, the height of the lug is about one-half of the pitch of the thread
on the outer surface of the neck.

In a preferred closure, the outer surface of the outer skirt defines knurls therein extending generally from the bottom edge toward the top end of the closure. The inner surface of the outer skirt has one or more ribs

5 extending from about the middle thereof toward the top end to mechanically strengthen the closure. Most preferably, there are three to six ribs. The shoulder has a more preferred diameter of about 0.5 to about 0.75 inch and a most preferred diameter of about 0.6 inch. The inner and outer skirts are most preferably tapered inward about 0.5° (degrees) with respect to the

10 longitudinal extension of the closure to enhance moldability during injection molding of the closure. The closure preferably has a plug seal extending circumferentially from the top end generally directional to the longitudinal extension of the closure. The plug seal is adapted to fit within and seal the orifice when the closure is in locking position with the head. In lieu of a

15 plug seal, the closure may have a foam layer situated at a central area of an inner surface of the top end thereof. The foam layer would be adapted to fit over and seal the orifice when the closure is in locking position with the head. The shoulder can be sloped or flat in shape. The thread on the neck preferably has a pitch of about 0.1 to about 0.12 inch and most

20 preferably a pitch of about 0.1 inch. In addition to having an initial full thread generally in alignment with a lug directional with the longitudinal extension of the neck, a preferred dispensing container also has a terminal full thread generally in alignment same.

25 An embodiment of a dispensing tube package is shown in Figure 1 and is generally referenced by the numeral 10. Package 10 has a dispensing container 20 and a closure 12 engageable and lockable with container 20. Closure 12 is shown in isolation in Figure 2. As shown in Figure 5, container 20 has a body wall 16 and a head 22. Head 22 has a

30 neck 24 and a shoulder 26. Body wall 16 defines a chamber 28 therein. Neck 24 communicates with body wall 16 via shoulder 26. Neck 24 has an orifice 28 therein and a passageway 30 therethrough extending from orifice 28 to chamber 28.

As shown in Figures 6 and 7, lugs 32 and 34 extend from shoulder 26 radially outward from neck 24 to adjacent the periphery of shoulder 26. Lugs 32 and 34 are situated generally oppositely about neck 24. Lugs 32 and 34 define flat surfaces 52 and 54 and angled surfaces 56 and 58,
5 respectively. In lug 32, angled surface 56 slopes upward from shoulder 26 to intersect with flat surface 52, which extends generally directionally with the longitudinal extension of neck 24. In lug 34, angled surface 58 slopes upward from shoulder 26 to intersect with flat surface 54, which extends generally directionally with the longitudinal extension of neck 24. Lugs 32
10 and 34 take the general shape of a triangloid or a wedge.

Thread 36 extends from an upper portion of neck 24. Thread 36 has a pitch of about 0.08 to about 0.16 inch. Thread 36 has an initial full thread 60 and a terminal full thread 62 generally in alignment with flat surface 52
15 of lug 32 directional with the longitudinal extension of neck 24.

As shown in Figures 3 and 4, closure 12 has a top end 38 having a generally circumferential outer skirt 40 extending therefrom. Closure 12 also has a generally circumferential inner skirt 42 extending therefrom
20 inside outer skirt 40. Inner skirt 42 has a thread 46 extending from its inner surface. Thread 36 of neck 24 can be screwed into thread 46 of inner skirt 42. Outer skirt 40 terminates at a first edge 48 opposite top end 38. Inner skirt 42 terminates at a second edge 50 opposite top end 38. Outer skirt 40 has a slot 14 and another slot 15 oppositely situated thereabout that extend
25 inwardly therein from first edge 48. Slot 14 has an angled edge 62 that angles and curves inward into outer skirt 40 and intersects a vertical edge 64 that is generally directional with respect to the longitudinal extension of outer skirt 40. Slot 15 has an angled edge 66 that angles and curves inward into outer skirt 40 and intersects a vertical edge 68 that is generally
30 directional with respect to the longitudinal extension of outer skirt 40. Slots 14 and 15 are adapted to receive an outer portion of each of lugs 32 and 34, respectively, when closure 12 is in locking position with head 22 as shown in Figures 1 and 8. Slots 14 and 15 slide over and/or around the outer portion of lugs 32 and 34 as closure 12 is screwed on container 20.

In locking position, verticle edge 64 is generally in abutment with or adjacent to vertical surface 52 and vertical edge 68 of slot 15 is generally in abutment with or adjacent to vertical surface 54. Further in locking position, angled edge 62 is generally in abutment with or adjacent to angled surface 56 and a corresponding angled edge (not shown) of slot 15 is generally in abutment with or adjacent to angled surface 58.

Closure 12 defines knurls 18 and 19 therein at the outer surface of outer skirt 40 extending from first edge 48 toward top end 38. Knurls 18 and 19 provide a gripping surface for the fingers (not shown) to squeeze, turn and remove closure 12 from container 20. When closure 12 is squeezed at knurls 18 and 19, the portions of outer skirt 40 having slots 14 and 15 therein are forced outward, thereby releasing lugs 32 and 34 from their locking position with slots 14 and 15.

15

An embodiment of a dispensing container is shown in Figure 12 and is generally referenced by the numeral 80. Closure 12 is shown in isolation in Figure 2. Container 80 has a body wall 88 and a head 82. Head 82 has a neck 84 and a shoulder 86. Body wall 88 defines a chamber 89 therein. Neck 84 communicates with body wall 88 via shoulder 86. Neck 84 has an orifice 94 therein and a passageway 98 therethrough extending from orifice 94 to chamber 89.

As shown in Figures 13 to 16, lugs 90 and 92 radially extend from shoulder 86 from neck 84 to adjacent the periphery of shoulder 86. Lugs 90 and 92 are situated generally oppositely about neck 84. Lugs 90 and 92 define flat surfaces 100 and 102, normal surfaces 104 and 106 and angled surfaces 108 and 110, respectively. In lug 90, angled surface 108 slopes upward from shoulder 86 to generally intersect with flat surface 100, which extends generally directionally with the longitudinal extension of neck 84. Normal surface 104 also extends generally directionally with the longitudinal extension of neck 84 and is also generally perpendicular with respect to flat surface 108. In lug 92, angled surface 110 slopes upward from shoulder 86 to generally intersect with flat surface 102, which extends

generally directionally with the longitudinal extension of neck 84. Normal surface 106 also extends generally directionally with the longitudinal extension of neck 84 and is also generally perpendicular with respect to flat surface 102. The relative configuration of flat surfaces 100 and 102 and 5 normal surfaces 104 and 106 provides lugs 90 and 92 with a "notched" appearance.

Thread 96 extends from an upper portion of neck 84. Thread 96 has a pitch of about 0.08 to about 0.16 inch. Thread 96 has an initial full thread 10 112 and a terminal full thread 114 generally in alignment with flat surface 100 of lug 90 directional with the longitudinal extension of neck 84.

Closure 12 is engageable and lockable with container 80. Slots 14 and 15 of closure 12 are adapted to receive an outer portion of each of lugs 15 90 and 92, respectively, when closure 12 is in locking position with head 82. Slots 14 and 15 slide over and/or around the outer portion of lugs 90 and 92 as closure 12 is screwed on container 80. In locking position, verticle edge 64 of closure 12 is generally in abutment with or adjacent to flat surface 100 and vertical edge 68 of slot 15 is generally in abutment with 20 or adjacent to flat surface 102. Further in locking position, angled edge 62 is generally in abutment with or adjacent to angled surface 108 and a corresponding angled edge (not shown) of slot 15 is generally in abutment with or adjacent to angled surface 110.

25 Another embodiment of a dispensing container is shown in Figure 17 and is generally referenced by the numeral 130. Container 130 has a body wall 138 and a head 132. Head 132 has a neck 134 and a shoulder 136. Body wall 138 defines a chamber 139 therein. Neck 134 communicates with body wall 138 via shoulder 136. Neck 134 has an 30 orifice 144 therein and a passageway 148 therethrough extending from orifice 144 to chamber 139.

As shown in Figures 18 to 20, lugs 140 and 142 radially extend from shoulder 136 adjacent the periphery of shoulder 136. Lugs 140 and 142

generally have the shape of a wedge and are isolated from and non-integral with neck 134. Lugs 140 and 142 are situated generally oppositely about neck 134. Lugs 140 and 142 define flat surfaces 150 and 152 and angled surfaces 154 and 156, respectively. In lug 140, angled surface 154

5 slopes upward from shoulder 136 to intersect with flat surface 150, which extends generally directionally with the longitudinal extension of neck 134. In lug 142, angled surface 156 slopes upward from shoulder 136 to intersect with flat surface 152, which extends generally directionally with the longitudinal extension of neck 134.

10

Thread 146 extends from an upper portion of neck 134. Thread 146 has a pitch of about 0.08 to about 0.16 inch. Thread 146 has an initial full thread 158 and a terminal full thread 160 generally in alignment with flat surface 150 of lug 140 directional with the longitudinal extension of neck
15 134.

Closure 12 of Figure 2 is engageable and lockable with container 130. Slots 14 and 15 of closure 12 are adapted to receive an outer portion of each of lugs 140 and 142, respectively, when closure 12 is in locking
20 position with head 132. Slots 14 and 15 slide over and/or around the outer portion of lugs 140 and 142 as closure 12 is screwed on container 130. In locking position, verticle edge 64 of closure 12 is generally in abutment with or adjacent to flat surface 150 and vertical edge 68 of slot 15 is generally in abutment with or adjacent to flat surface 152. Further in locking position,
25 angled edge 62 is generally in abutment with or adjacent to angled surface 154 and a corresponding angled edge (not shown) of slot 15 is generally in abutment with or adjacent to angled surface 156.

As shown in Figures 10 and 11, there is a closure 170 having a top
30 end 172 having a generally circumferential outer skirt 174 extending therefrom. Closure 170 also has a generally circumferential inner skirt 176 extending therefrom inside outer skirt 174. Inner skirt 176 has a thread 178 extending from its inner surface. The threads of any of the dispensing containers shown herein can be screwed into thread 178. Outer skirt 174

terminates at a first edge 180 opposite top end 172. Inner skirt 176 terminates at a second edge 182 opposite top end 172. Outer skirt 174 has a slot 184 and another slot 186 oppositely situated thereabout that extend inwardly therein from first edge 180. Slot 184 has an angled edge 5 188 that angles and curves inward into outer skirt 174 and intersects a vertical edge 192 that is generally directional with respect to the longitudinal extension of outer skirt 174. Slot 186 has an angled edge 190 that angles and curves inward into outer skirt 174 and intersects a vertical edge 194 that is generally directional with respect to the longitudinal 10 extension of outer skirt 174. Slots 184 and 186 are adapted to receive an outer portion of and lock with the lugs of any of the dispensing containers shown herein. Slots 184 and 186 slide over and/or around the outer portion of such lugs. In locking position, verticle edges 192 and 194 are generally in abutment with or adjacent to the vertical surface of such lugs. 15 Closure 170 has a plug seal 200 extending circumferentially from top end 172 generally directional to the longitudinal extension of closure 170. Plug seal 200 is adapted to fit within and seal an orifice of a head of a dispensing container when closure 170 is in locking position therewith.

20 The package, including dispensing container and closure, may be produced by any method known in the art such as extrusion or lamination. In extrusion, plastic tubes are extruded continuously then cut into discrete lengths to form tubular body walls for the inner and outer containers. Tubes of different diameters are used the inner and outer containers. 25 Heads are then heat welded or adhered to the tube lengths of both diameters to form the inner and outer containers. The inner container is inserted into the open end of the outer container and attached to or inserted into the head and/or neck of outer container. A closure, cap or top is applied to the head of the outer container. The open ends of inner and 30 outer containers are typically filled with functional and/or decorative products to be dispensed and then sealed by heat or mechanical means. Overlapping the ends and heat sealing is preferred. In lamination, sheets of plastic material are rolled into tubes and sealed along the sheet edges to form continuous tubes. The continuous tubes are cut into discrete tube

lengths and further processed in the same manner as when forming extruded dispensing containers.

The closure and head may be manufactured according to any

5 method known in the art such as injection molding, compression molding or stamping with a plastic material. Injection molding is preferred.

The package may be manufactured from any plastic material known in the art. Representative plastic materials include ethylene polymers,

10 propylene polymers, polyesters, and polyamides. Useful ethylene polymers include low density polyethylene, medium density polyethylene, high density polyethylene and linear low density polyethylene. A useful propylene polymer is polypropylene. Useful polyesters include polyethylene terephthalate. Preferred plastic materials are low density

15 polyethylene and polypropylene. Different parts of the package may be manufactured from the same or different materials. A preferred plastic material for tube body walls is low density polyethylene. Preferred plastic materials for the head and the closure are high density polyethylene and polypropylene.

20

It should be understood that the foregoing description is only illustrative of the present invention. Various alternatives and modifications can be devised by those skilled in the art without departing from the invention. Accordingly, the present invention is intended to embrace all

25 such alternatives, modifications and variances which fall within the scope of the appended claims.

WHAT IS CLAIMED IS

- 1. A dispensing package, comprising:**
- 5 a dispensing container, the container having a body wall and a head, the head having a neck and a shoulder, the body wall defining a chamber therein, the neck communicating with the body wall via the shoulder, the neck having an orifice therein and a passageway there through extending from the orifice to the chamber, one or more lugs extending from the
- 10 shoulder adjacent the periphery of the shoulder, the neck having a first thread extending therefrom, the first thread having a pitch of about 0.08 to about 0.16 inch and an initial full thread generally in alignment with the lug directional with the longitudinal extension of the neck,
- 15 a closure engageable and lockable with the dispensing container, the closure having a top end having a generally circumferential outer skirt extending therefrom and a generally circumferential inner skirt extending therefrom, the inner skirt being situated inside the outer skirt, the inner skirt having a second thread extending therefrom at an inner surface, the
- 20 second thread being rotatably engageable with the first thread of the neck, the outer skirt terminating at a first edge opposite the top end, the inner skirt terminating at a second edge opposite the top end, the outer skirt having a slot therein extending inward from the edge, the slot therein being adapted to receive a portion of the lug therein when the closure is in locking
- 25 position with the head.

- 2. The package of claim 1, wherein the slot is substantially the same shape as the portion of the lug receivable therein.**
- 30 3. The package of claim 2, wherein the slot defines a vertical edge adjacent thereto, also wherein the vertical edge is generally directional with respect to the longitudinal extension of the outer skirt.
- 35 4. The package of claim 3, wherein the one or more lugs defines a flat

surface generally directional with the longitudinal extension of the neck, the flat surface being engageable with the vertical edge when the closure is in locking position with the head.

5 5. The package of claim 1, wherein the one or more lugs extends from the neck radially outward.

6. The package of claim 1, wherein the one or more lugs is isolated from and non-integral with the neck.

10

7. The package of claim 3, wherein the one or more lugs has a notch therein at an outer portion thereof, the notch bearing the flat surface.

15

8. The package of claim 1, wherein there are two lugs extending from the shoulder, the two lugs being positioned oppositely about the neck.

9. The package of claim 6, wherein there are two lugs extending from the shoulder, the two lugs being positioned oppositely about the neck.

20

10. The package of claim 3, wherein the slot extends angularly from the edge therein to the vertical edge.

11. The package of claim 1, wherein an outer surface of the outer skirt defines knurls therein extending generally from the first edge toward the top end.

25

12. The package of claim 1, wherein one or more ribs extend from an inner surface of the outer skirt from about the middle thereof toward the top end.

30

13. The package of claim 12, wherein there are three to six ribs.

14. The package of claim 1, wherein the shoulder has a diameter of about 0.5 to about 0.75 inch.

15. The package of claim 14, wherein the shoulder has a diameter of about 0.6 inch.

16. The package of claim 1, wherein the inner and outer skirts are tapered 5 inward about 0.5° with respect to the longitudinal extension of the closure.

17. The package of claim 1, wherein the closure has a plug seal extending circumferentially from the top end generally directional to the longitudinal extension of the closure, and wherein the plug seal is adapted to fit within 10 and seal the orifice when the closure is in locking position with the head.

18. The package of claim 1, wherein the closure has a foam layer situated at a central area of an inner surface of the top end thereof, the foam layer being adapted to fit over and seal the orifice when the closure is in locking 15 position with the head.

19. The package of claim 1, wherein the shoulder is substantially flat in shape.

20 20. The package of claim 1, wherein the first thread has a pitch of about 0.1 to about 0.12 inch.

21. The package of claim 1, wherein the first thread has a pitch of about 0.1 inch.

25 22. The package of claim 1, wherein the height of the lug is about one-half of the pitch of the thread on the outer surface of the neck.

30 23. The package of claim 1, wherein the thread of the neck has a terminal full thread generally in alignment with the lug directional with the longitudinal extension of the neck.

24. A dispensing container, comprising:

a body wall and a head, the head having a neck and a shoulder, the body
5 wall defining a chamber therein, the neck communicating with the body wall
via the shoulder, the neck having an orifice therein and a passageway
there through extending from the orifice to the chamber, one or more lugs
extending from the shoulder adjacent the periphery of the shoulder, the
neck having a first thread extending therefrom, the first thread having a
10 pitch of about 0.08 to about 0.16 inch and an initial full thread generally in
alignment with the lug directional with the longitudinal extension of the
neck.

25. The package of claim 24, wherein the one or more lugs defines a flat
15 surface generally directional with the longitudinal extension of the neck.

26. The package of claim 24, wherein the one or more lugs extends from
the neck radially outward.

20 27. The package of claim 24, wherein the one or more lugs is isolated from
and non-integral with the neck.

28. The package of claim 25, wherein the one or more lugs has a notch
therein at an outer portion thereof, the notch bearing the flat surface.
25

29. The package of claim 24, wherein there are two lugs extending from the
shoulder, the two lugs being positioned oppositely about the neck.

30 30. The package of claim 27, wherein there are two lugs extending from the
shoulder, the two lugs being positioned oppositely about the neck.

31. The package of claim 24, wherein there are two lugs take the general
shape of a triangloid.

32. The package of claim 24, wherein the shoulder has a diameter of about 0.5 to about 0.75 inch.

33. The package of claim 24, wherein the shoulder has a diameter of about 5 0.6 inch.

34. The package of claim 24, wherein the shoulder is substantially flat in shape.

10 35. The package of claim 24, wherein the first thread has a pitch of about 0.1 to about 0.12 inch.

36. The package of claim 24, wherein the first thread has a pitch of about 0.1 inch.

15 37. The package of claim 24, wherein the height of the lug is about one-half of the pitch of the thread on the outer surface of the neck.

38. The package of claim 24, wherein the thread of the neck has a terminal 20 full thread generally in alignment with the lug directional with the longitudinal extension of the neck.

39. A closure, comprising:

25 a top end having a generally circumferential outer skirt extending therefrom and a generally circumferential inner skirt extending therefrom, the inner skirt being situated inside the outer skirt, the inner skirt having a second thread extending therefrom at an inner surface, the second thread being rotatably engageable with the first thread of the neck, the outer skirt

30 terminating at a first edge opposite the top end, the inner skirt terminating at a second edge opposite the top end, the outer skirt having a slot therein extending inward from the edge, the slot defining a flat surface adjacent thereto, the flat surface being generally directional with the longitudinal extension of the outer skirt. the slot extending angularly from the edge

therein to the flat surface.

40. The package of claim 39, wherein an outer surface of the outer skirt defines knurls therein extending generally from the first edge toward the top end.

5

41. The package of claim 39, wherein one or more ribs extend from an inner surface of the outer skirt from about the middle thereof toward the top end.

10

42. The package of claim 41, wherein there are three to six ribs.

43. The package of claim 39, wherein the inner and outer skirts taper inward about 0.5° with respect to the longitudinal extension of the closure.

15

44. The package of claim 39, wherein the closure has a plug seal extending circumferentially from the top end generally directional to the longitudinal extension of the closure.

20 45. The package of claim 39, wherein the closure has a foam layer situated at a central area of an inner surface of the top end thereof.

25

ABSTRACT OF THE DISCLOSURE

A dispensing tube package. The package has a dispensing container and a closure engageable and lockable with the dispensing container. The container has a body wall and a head. The head has a neck and a shoulder. The body wall defines a chamber therein. The neck communicates with the body wall via the shoulder. The neck has an orifice therein and a passageway therethrough extending from the orifice to the chamber. One or more lugs extend from the shoulder adjacent the periphery of the shoulder. The neck has a first thread extending therefrom. The first thread has a pitch of about 0.08 to about 0.16 inch and an initial full thread generally in alignment with the lug directional with the longitudinal extension of the neck. The closure has a top end having a generally circumferential outer skirt extending therefrom and a generally circumferential inner skirt extending therefrom. The inner skirt is situated inside the outer skirt. The inner skirt has a second thread extending therefrom at an inner surface. The second thread is rotatably engageable with the first thread of the neck. The outer skirt terminates at a first edge opposite the top end. The inner skirt terminates at a second edge opposite the top end. The outer skirt has a slot therein extending inward from the edge. The slot therein is adapted to receive a portion of the lug therein when the closure is in locking position with the head. Further, there is a dispensing container. Still further, there is a closure.

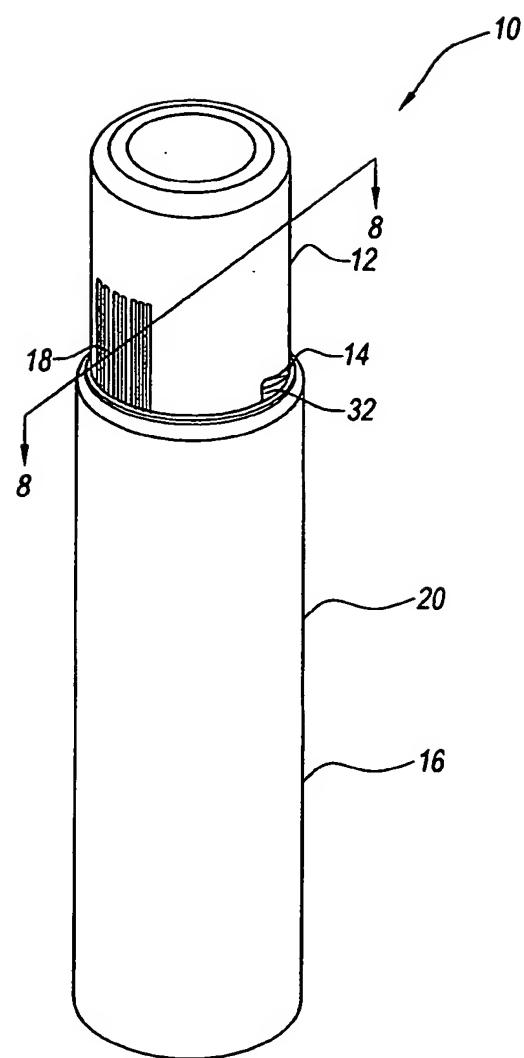


Fig. 1

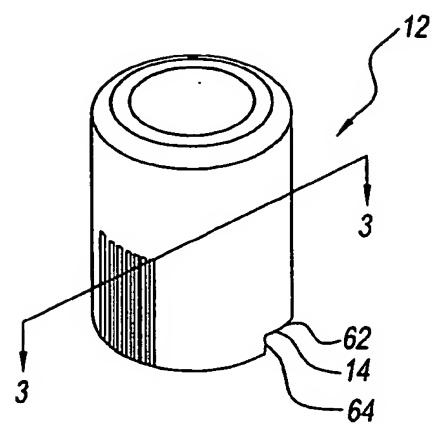


Fig. 2

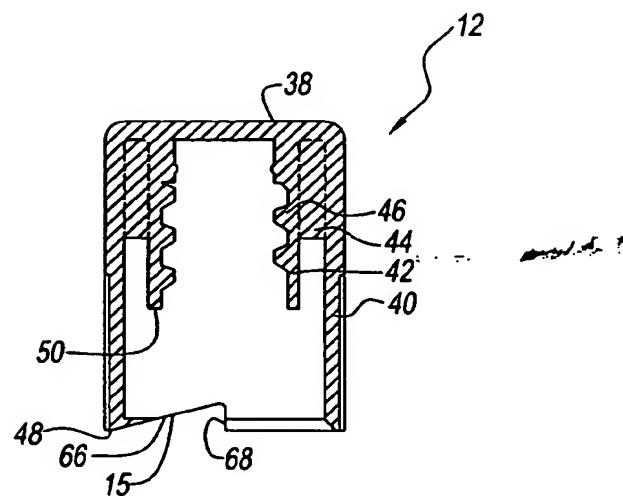


Fig. 3

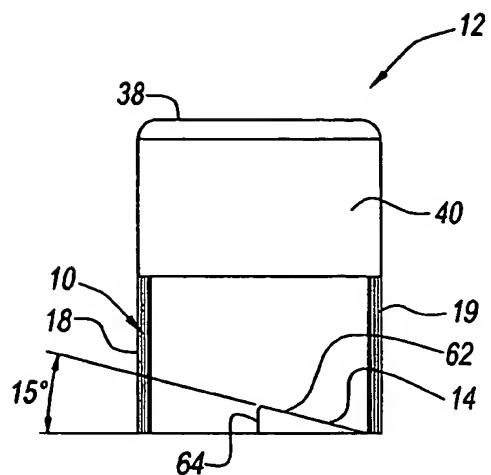


Fig. 4

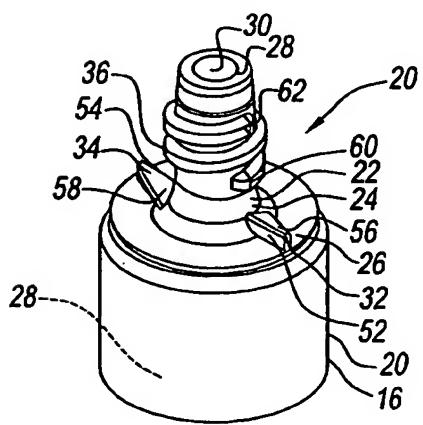


Fig. 5

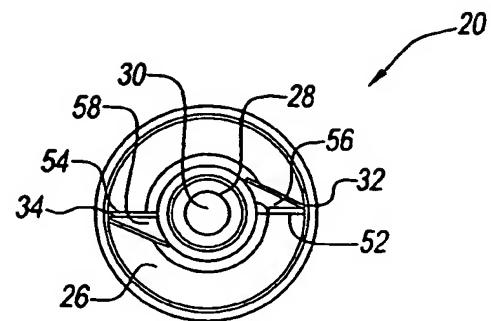


Fig. 6

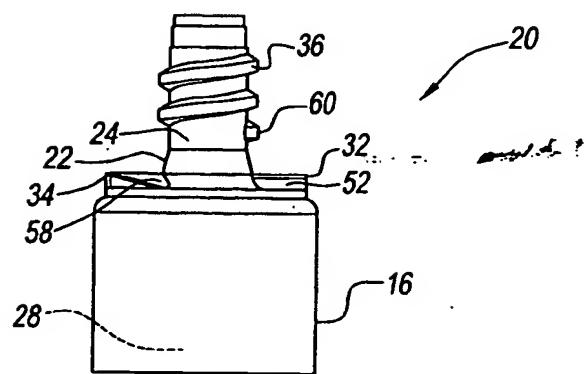


Fig. 7

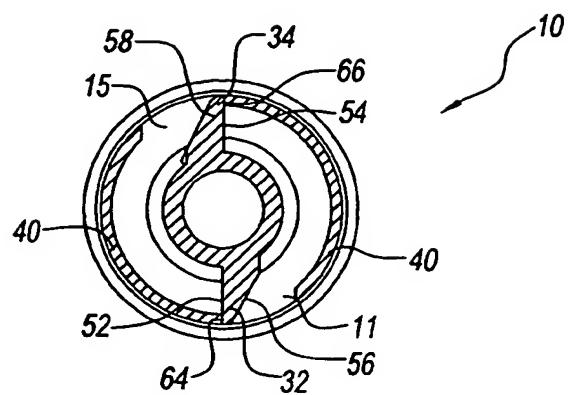


Fig. 8

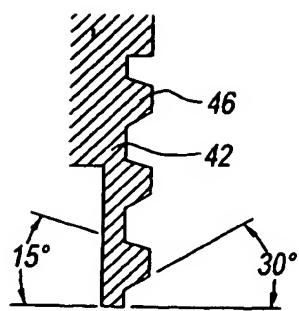


Fig. 9

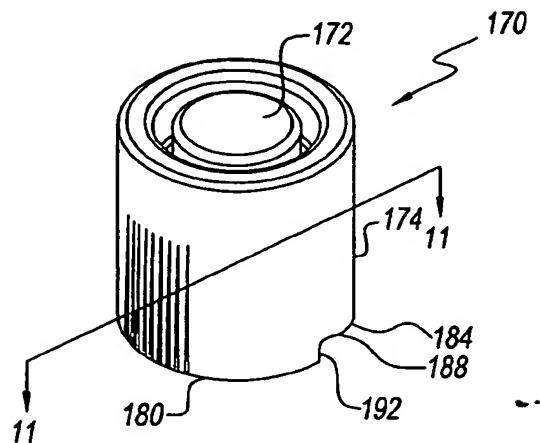


Fig. 10

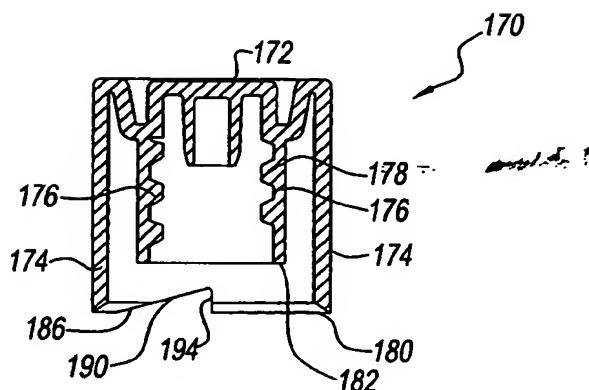


Fig. 11

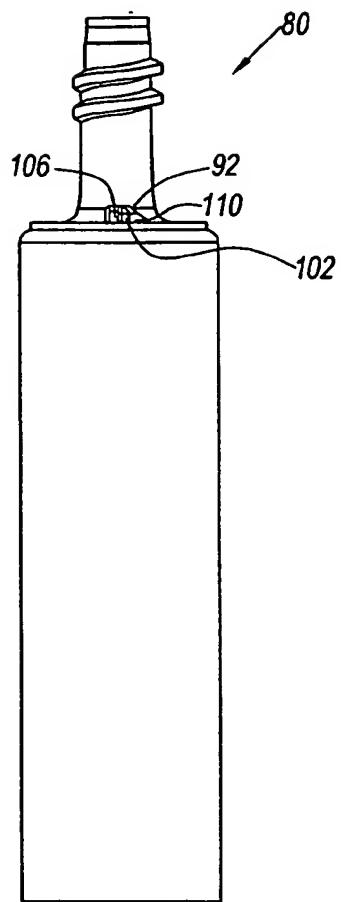
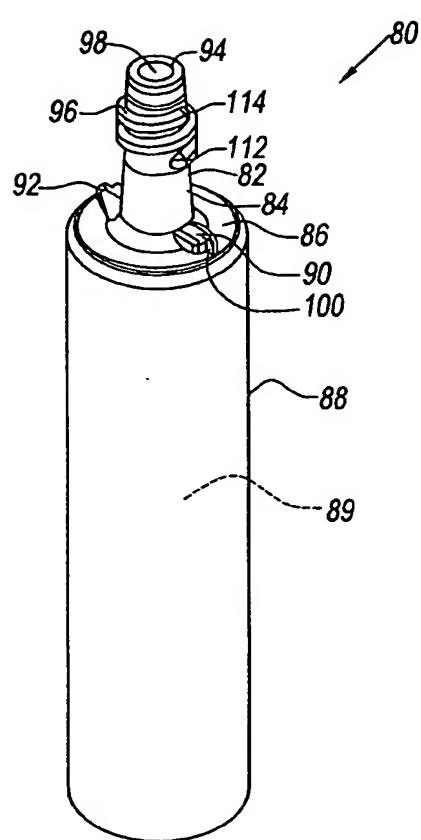


Fig. 12

Fig. 13

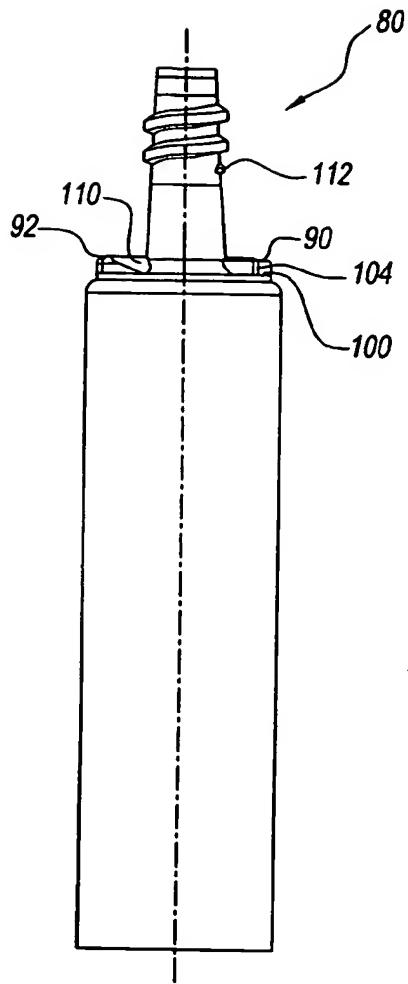


Fig. 14

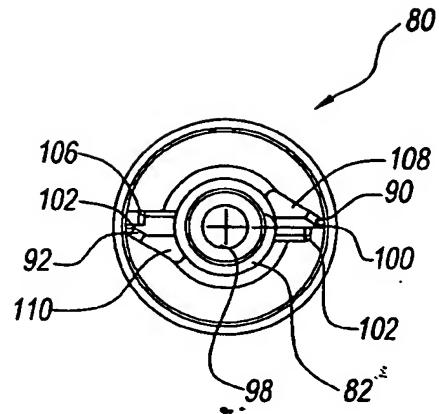


Fig. 15

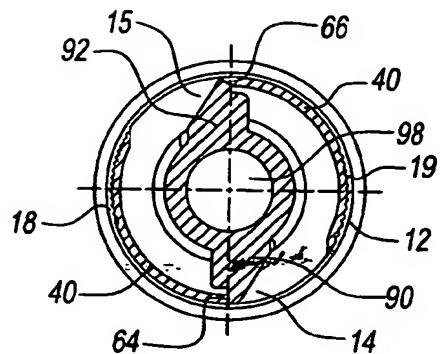


Fig. 16

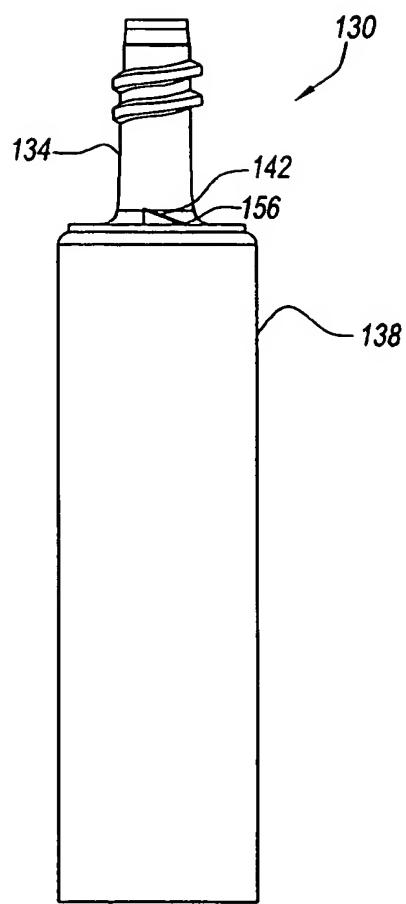
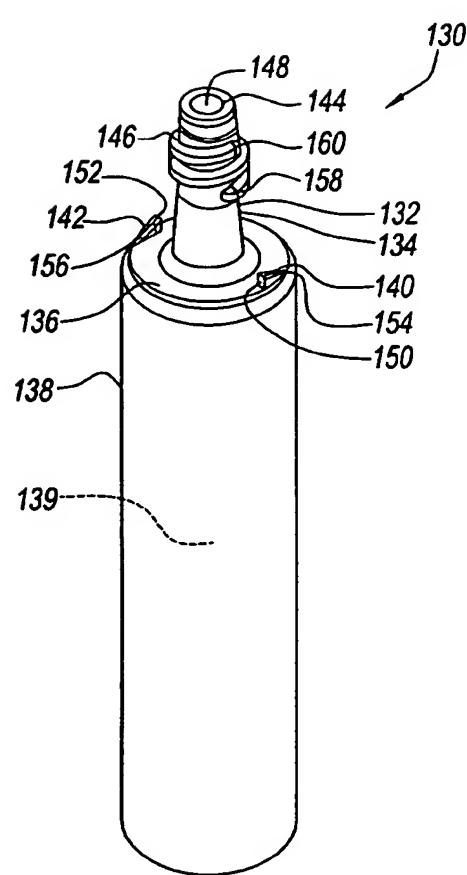


Fig. 17

Fig. 18

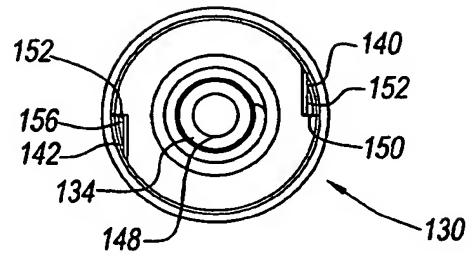
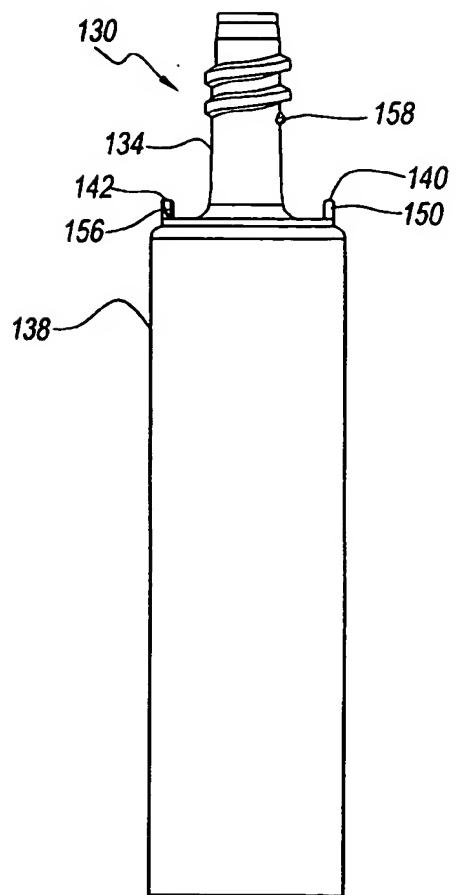


Fig. 20

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/033173

International filing date: 08 October 2004 (08.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/510,253
Filing date: 10 October 2003 (10.10.2003)

Date of receipt at the International Bureau: 05 November 2004 (05.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse